

# 3M™ AccuGlide™ V HSP Taping Head

**Fast. Consistent. Reliable.**

Today's market demands a versatile taping head that seals under-filled cases without compromising tape adhesion. The new 3M™ AccuGlide™ V HSP Taping Head delivers consistent seals at belt speeds up to 150fpm.

It's narrow design fits most case sealers and case erectors on the market and has the ability to run at multiple speeds, making it our most versatile taping head yet!





## Case Size Capacities\*

**Length:** 6.0" to unlimited

**Width:** 6.0" to unlimited

**Height:** 3.25" to unlimited

\*Note: Case size minimums and maximums may also be determined by the case conveying system used. Cases must meet accepted industry standards.

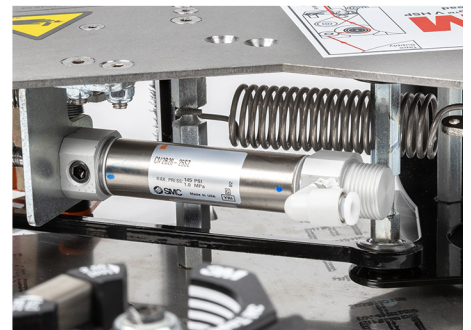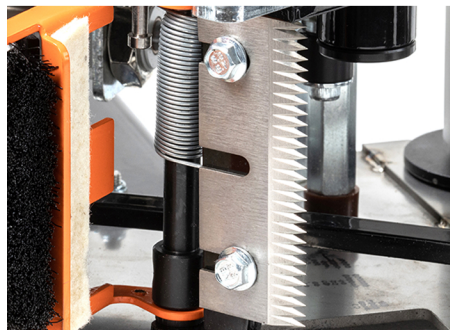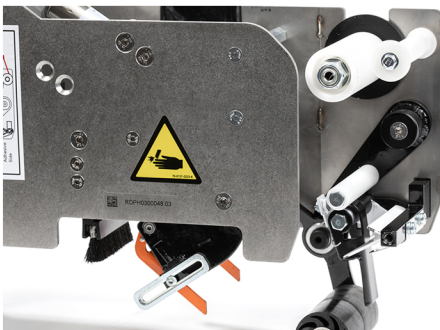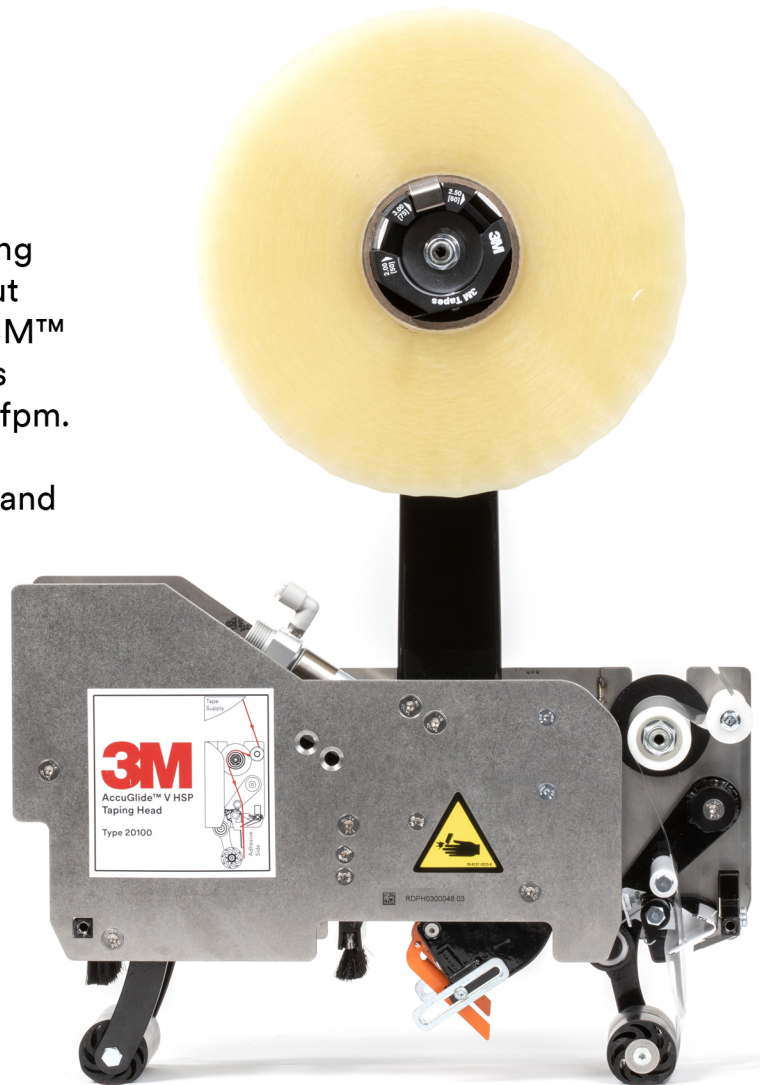

shown with optional blade retract

# 3M™ AccuGlide™ V HSP Taping Head

## Innovative Features:

- Applies tape at belts speeds up to 150fpm
- Available in 2" and 3" models
- Full width cutting blade
- Exposed tape path for easy tape threading
- Soft touch for under-filled cases
- Narrow design for retrofitting
- Reinforced key areas for increased durability
- Middle and rear brushes for better tape wipe down

## Options:

- Blade retract
- Tape Monitoring System available with audible and visible alarms

## Specifications:

**Tape:** For use with Scotch® Box Sealing Tapes

**Width:** 48mm or 2" (50mm) for 2" models  
72mm or 3" (76mm) for 3" models

**Tape Roll Diameter:** Up to 15.5" (390mm) maximum on a 3" (76mm) diameter core.

**Tape Leg Application Length:** 2" (51mm)

## Taping Head Dimensions

|   | 2"            | 3"            |
|---|---------------|---------------|
| <b>Length</b><br>in. (mm)                           | 15.75 (400)   | 15.75 (400)   |
| <b>Width</b><br>in. (mm)                            | 3.13" (79.5)  | 4.07 (103.5)  |
| <b>Height to Center of<br/>Tape Hub</b><br>in. (mm) | 15.09 (383.3) | 15.09 (383.3) |

Contact your 3M representative for special modifications that may be available for sizes not listed. Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

Visit [3M.com/AccuGlide](https://www.3M.com/AccuGlide)  
for more information



3M Closure and Masking System Division  
3M Center, Building 225-3S-06  
St. Paul, MN 55144-1000

Phone 800-362-3550  
Web [3M.com/packaging](https://www.3M.com/packaging)

## Warranty:

1. 3M warrants its 3M™ AccuGlide™ Taping Heads 2+ and 3 with the following warranties:
  - A) The taping head knife blades, springs and rollers will be free from defects for ninety (90) days after delivery.
  - B) All other taping head parts will be free from all defects for three (3) years after delivery.
2. 3M warrants its 3M™ AccuGlide™ Taping Heads 4, HST, NPH and NPH Stainless Steel with the following warranties:
  - A) The taping head knife blades, springs and rollers will be free from defects for ninety (90) days after delivery.
  - B) All other taping head parts will be free from all defects for one (1) year after delivery.

If any part is proved to be defective within the warranty period, then the exclusive remedy and 3M's sole option is to repair or replace the part, provided the defective part is returned immediately to 3M's factory or an authorized service station designated by 3M. A part will be presumed to have become defective after the warranty period unless the part is received or 3M is notified of the problem no later than five (5) calendar days after the warranty period. If 3M is unable to repair or replace the part within a reasonable time, then 3M, at its option, will replace the equipment or refund the purchase price. 3M shall have no obligation to provide or pay for the labor required to install repaired or replacement parts. 3M shall have no obligation to repair or replace (1) those parts failing due to operator misuse, carelessness, or due to any accidental cause other than equipment failure, or (2) parts failing due to non-lubrication, inadequate cleaning, improper operating environment, improper utilities or operator error. Limitation of Liability: 3M shall not be liable for direct, indirect, special, accidental or consequential damages based upon breach of warranty, breach of contract, negligence, strict liability or any other legal theory.

